



BUREAU  
VERITAS  
CE Official  
Certification

## PRESSES

Compact and functional design which integrates all the hydraulic elements within the chassis, provides a saving in the workshop space and ensures protection in transport.  
Supplied fully assembled and ready for work.  
Set of two V blocks included and legs with boltholes for fixing to the floor.

Set of punches.  
Optional.

Screw extension  
for quick approach  
and fine adjustment.

Sliding cylinder all along the  
head on PRD models.


A-5609

Big removable tray. Optional.

PRD20

Workbench holds a removable tray to take parts, grease, dirt, ...  
Patented.

Winch to assist easy and quick  
positioning of the workbench.

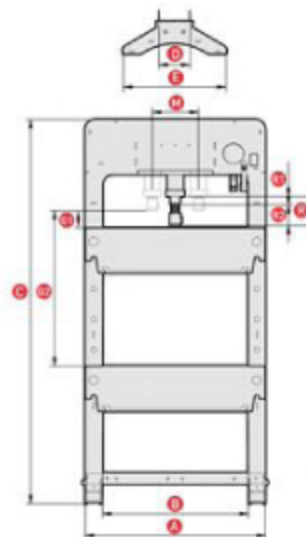

CAPACITY (t)	20	30	50
A	890	890	890
B	720	720	720
C	1900	1900	1900
D	150	150	150
E	490	490	490
C1 Minimum	84	84	84
C2 Maximum	770	770	770
R1 Hydraulic stroke	120	120	120
R2 Extension stroke	75	75	75
R Total stroke	195	195	195
M Lateral stroke	228	212	189
Weight (kg)	143	147	191

### REFERENCES

Two piston manual pump	PRD20	PRD30	PRD50
Manual and pneumatic hand pump	PRD20N	PRD30N	PRD50N
Manual and pneumatic foot pump	PRD20NF	PRD30NF	PRD50NF

Measures in mm.

PRD50NF

made in spain

8 Presses



**PRESSES**

Compact and functional design which integrates all the hydraulic elements within the chasis, provides a saving in the workshop space and ensures protection in transport.

Pressure gauge with damper to extend its working life. It is positioned at eye level to make for easy reading. Supplied fully assembled and ready for work. Set of two V blocks included. Workbench adjustable for height..


The **K100** press is equipped with a double-acting cylinder and two speed hand pump.

We do, however, recommend the electric pump as shown in the picture.

Electric pump with asynchronous 4-pole, 1400 rpm motor.

Double acting pump and control system. Safety on-off switch and oil level control.

**K100e**

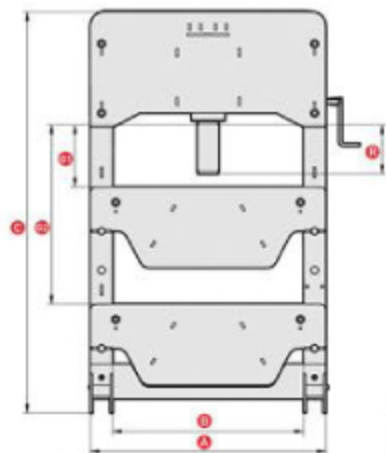

<b>CAPACITY (t)</b>	<b>100</b>
<b>A</b>	1200
<b>B</b>	975
<b>C</b>	2050
<b>D</b>	260
<b>E</b>	715
<b>G1</b> Minimum	115
<b>G2</b> Maximum	915
<b>R</b> Total stroke	250
<b>Weight (kg)</b>	<b>620</b>
<b>REFERENCES</b>	
With manual pump	<b>K100</b>
With electric pump	<b>K100E</b>
Measures in mm.	



Safety overload valve.



Hydraulic stroke limitation.



Automatic spring return of piston.



Manometer

Accessories



Press protection. Two models [See next page]



**A-5600**  
Set of punches.  
Optional.

\* Cylinders have a greater capacity than punches or V-blocks. A well balanced distribution of pressure on V-blocks is compulsory.



**A-5609**

Big removable tray.  
Optional.